


寸法図

FSIV-FCIV

FSIV

FSスタンダードタイプ/FCコンパクトタイプ メスソケットエンド

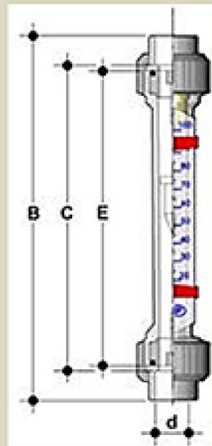

d	B	C	E
25	394	356	350
32	400	356	350
40	408	356	350
50	418	356	350
63	432	356	350
75	444	356	350


FCIV

d	B	C	E
16	199	171	165
20	208	176	170
25	229	191	185
32	250	206	200

FSFV-FCFV

FSFV

FSスタンダードタイプ/FCコンパクトタイプ BS並行メスネジエンド

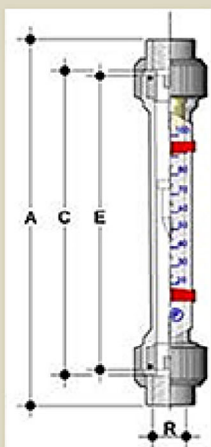

R	A	C	E
3/4"	397	356	350
1"	401	356	350
1 1/4"	406	356	350
1 1/2"	413	356	350
2"	421	356	350
2 1/2"	-	356	350

FCFV

R	A	C	E
3/8"	198	171	165
1/2"	212	176	170
3/4"	232	191	185
1"	251	206	200

				流体 (液体)の種類				
フロート材質	d	DN	R	水	塩酸 30-33%	水酸化ナトリウム30%	水酸化ナトリウム 50%	
				測定管材質				
				PVC-U - PA - PSU	PVC-U - PSU			
				測定範囲 [l/h]				
PP PP + マグ ネット	25	20	3/4"	15-150	14-140	2,5-54	0,5-9,5	
				25-250	23-230	6-115	1,5-23	
				45-450	42-420	11-235	3-65	
				70-700	65-650	28-410	7-145	
	32	25	1"	25-250	23-230	6-125	1-20	
				40-400	37-370	10-200	2,5-50	
				65-650	60-600	11-395	5,5-130	
	40	32	1 1/4"	100-1000	90-900	25-650	10-260	
				100-1000	80-900	25-600	10-200	
				160-1600	150-1500	55-1100	20-500	
	50	40	1 1/2"	200-2500	200-2300	100-1700	25-950	
				150-1600	140-1500	50-1000	25-425	
				200-2200	190-2000	100-1500	25-800	
	63	50	2"	250-2500	230-2300	120-1600	40-950	
				250-2500	230-2300	60-1700	30-800	
				350-3500	330-3200	90-2500	40-1400	
	75	65	2 1/2"	500-5000	470-4600	200-4000	80-2500	
				1000-8000	950-7500	670-6000	330-3800	
				1000-10000	930-9300	500-7500	170-5200	
	INOX INOX + マグ ネット	25	20	3/4"	5000-25000	4700-23000	4400-22000	4100-20000
					25-250	-	6-125	1-27
					40-400	-	10-240	2,5-70
					60-640	-	25-425	5-170
		32	25	1"	100-1000	-	35-725	15-350
40-400					-	10-240	2,5-65	
60-640					-	20-420	5-145	
100-1000					-	25-700	10-330	
40		32	1 1/4"	150-1600	-	50-1200	25-675	
				150-1600	-	50-1150	25-550	
				200-2500	-	100-1900	50-1100	
				400-4000	-	200-3200	100-2000	
50		40	1 1/2"	200-2500	-	100-1700	50-1000	
				400-4000	-	200-3000	50-1900	
				500-5000	-	200-3700	100-2500	
63		50	2"	400-4000	-	100-3000	50-1800	
				600-6000	-	250-4700	100-3100	
				1000-10000	-	500-8500	250-6000	
75		65	2 1/2"	1500-15000	-	1000-12000	250-9000	
				2000-20000	-	1500-16500	500-12500	
				10000-50000	-	8800-43000	8200-40000	

フロート材質	d	DN	R	流体 (気体)
				空気 1.013 Pabs
				測定管材質
				PA
				測定範囲 [Nm ³ /h]
PP	25	20	3/4"	0,2-2,5
				0,3-4
				0,5-6,5
				1-10
	32	25	1"	0,4-4
				0,5-6,5
				1-10
				1,5-16
	40	32	1 1/4"	1,5-16
				2-25
				4-40
				2-25
	50	40	1 1/2"	4-40
				5-50
				4-40
				6-64
63	50	2"	10-100	
			15-140	
			20-200	
			50-500	
PP + マグ ネット	25	20	3/4"	0,6-6
				1-10
				1,6-16
				2,5-25
	32	25	1"	1-10
				1,6-16
				2,5-25
				4-40
	40	32	1 1/4"	4-40
				6-60
				10-100
				6-60
	50	40	1 1/2"	10-100
				12,5-125
				10-100
				16-160
63	50	2"	25-250	
			35-350	
			50-500	
			50-500	

				流体 (液体)の種類				
フロート材質	d	DN	R	水	塩酸 30-33%	水酸化ナトリウム30%	水酸化ナトリウム 50%	
				測定管材質				
				PVC-U - PA - PSU	PVC-U - PSU			
				測定範囲 [l/h]				
PP PP+マグ ネット	16	10	3/8"	1,5-15	1,4-14			
				2-20	2-18	0,25-3	0,025-0,5	
				5-50	5-45	1-17	0,25-2,75	
				10-100	10-90	2,5-45	0,5-9	
				15-150	14-140	5-75	1-21	
	20	15	1/2"	2-25	2-23			
				5-50	5-45	1-12,5	0,1-2	
				10-100	10-90	2-34	0,25-5,5	
				15-150	14-140	2,5-63	0,5-12,5	
				20-200	19-185	5-104	2-25,5	
	25	20	3/4"	30-320		10-170	2,5-47,5	
				8-80	7,5-75			
				15-150	14-140	3,5-60	1-10	
				20-200	19-185	5-92	1-19	
	32	25	1"	30-350	30-325	8-165	2-45	
				50-650	45-600	20-380	4-130	
				20-200	19-185	5-90	1-15	
				30-300	28-280	7,5-150	2-40	
	INOX INOX+マグ ネット	16	10	3/8"	60-600	55-550	20-360	5-110
					100-1000	90-900	25-650	10-260
3-30					-			
4-40					-	0,5-8,5	0,05-1,4	
10-100					-	2,5-40	0,5-8	
20		15	1/2"	20-200	-	10-120	2,5-40	
				30-300	-	15-180	4-55	
				5-50	-			
				10-100	-	2,5-37,5	0,25-6,5	
				15-160	-	4-75	1-15	
25		20	3/4"	20-250	-	5-140	2-36	
				35-350	-	9-220	4-75	
				60-600	-	24-360	6-140	
				15-150	-			
				25-250	-	6-135	2,5-30	
32		25	1"	40-400	-	13-230	3-65	
				50-600	-	20-350	3,5-135	
				100-1200	-	25-650	20-320	
				40-400	-	10-220	2,5-55	
				50-600	-	20-350	5-125	
				100-1000	-	25-650	20-300	
				150-1500	-	50-1000	25-600	

フロート材質	d	DN	R	流体 (気体)
				空気 1.013 Pabs
				測定管材質
				PA
				測定範囲 [Nm ³ /h]
PP	16	10	3/8"	0,025-0,25
				0,04-0,4
				0,1-1
				0,2-2
	20	15	1/2"	0,045-0,45
				0,09-0,9
				0,15-1,5
				0,25-2,5
	25	20	3/4"	0,38-3,8
				0,12-1,2
				0,3-2,5
				0,45-4,5
	32	25	1"	0,6-6,5
				1,1-11
				0,6-4
				0,7-7
PP + マグ ネット	16	10	3/8"	1,1-11
				2-14
				0,06-0,6
				0,1-1
	20	15	1/2"	0,25-2,5
				0,45-4,5
				0,12-1,2
				0,2-2
	25	20	3/4"	0,35-3,5
				0,6-6
				1-10
				0,4-4,8
	32	25	1"	0,3-3
				0,6-6
				1,2-12
				1,6-16
				2,7-27
				1-10
				1,7-17
				2,7-27
				3,5-35